

Poindus

VariPOS

Simplify Operation,
Level up Business

250





* 2 x SATA III (2.5") - Option

Features

Powered USB Connection

The I/O provides the connectivity expected from a high performance POS terminal including a Powered USB option for all your retail peripherals.

RAID Redundancy

RAID implementation allows improved performance and redundancy giving your solution the fault tolerance and resiliency to avoid downtime. (*excludes J1900)



Patented Double Hinged 2nd Display

The 10.1" 2nd Display allows optimal positioning with the highly flexible double hinged design and dual mounting points allowing you to communicate directly with the customer at the Point Of Sale.



Tangible Service Benefits

Modularized Quick Service Design significantly reduces engineer onsite visit time for upgrades, replacements and regular service schedules.

Detail features



- Wide range of CPUs from J1900 to Intel 6th generation Celeron, Core i3/i5
- Intel AMT & Intel TPM Technology (i5 only)
- True flat 15" 4:3 LCD (LED backlight), 400 nits with IP66
- RAID 0/1 function with dual SSD/HDD support (PE21 Option)
- Patented swivel arm with flexible height/tilt adjustment for 2nd display and dual (Left/Right) base mounting points
- Supports 2x12v, 1x24v Powered USB (PE21 Option)
- Ultra slim front panel with durable die-cast Aluminum chassis; built to last
- Redefines serviceability from design with easy access & quick swap modular design for Display, MB Box & SSD/HDD
- Peripheral compatibility across the whole VariPOS 2xx series: LCM, 10.1" 2nd display with patented double hinge, MSR, iButton, Fingerprint, RFID

Peripheral Products



VariPOS 250 2nd Display



VariPOS 250 LCM / mPOS bracket
(Left / Right Base Mounting Points)



VariPOS 250
iButton



VariPOS 250
MSR



VariPOS 250
Fingerprint



VariPOS 250
RFID

Ordering Information

VariPOS 250 (PE20)

- VariPOS 250-J1900 | Intel® Celeron® J1900 2.42 GHz CPU
-



Multi-touch Screen



Waterproof - IP66 on Front Panel



Quick & Easy Maintenance



VariPOS 250 (PE21)

- VariPOS 250-i5-6500TE Intel® Skylake Core™ i5-6500TE 3.30 GHz CPU
 - VariPOS 250-i3-6100TE Intel® Skylake Core™ i3-6100TE 2.70 GHz CPU
 - VariPOS 250-Celeron-G3900TE Intel® Skylake Celeron® G3900TE 2.30 GHz CPU
-



Multi-touch Screen



Waterproof - IP66 on Front Panel



Quick & Easy Maintenance



RAID Function






Specification

Model Name		• VariPOS 250 (PE21)	• VariPOS 250 (PE20)
Main Board	Processor	Intel® Skylake Core™ i5-6500TE Processor Intel® Skylake Core™ i3-6100TE Processor Intel® Skylake Celeron® G3900TE Processor	Intel® Celeron® Processor J1900
	Chipset	Intel® H110 / Intel® Q170 (Option)	CPU Integrated
	System Memory	1 x SO-DIMM DDR4 slot, 4GB RAM as standard. Max. memory support up to 16GB.	1 x SO-DIMM DDR3L slot, 4GB RAM as standard. Max. memory support up to 8GB
	TPM	Intel F/W	N/A
	Intel AMT	N/A / YES (i5 only)	N/A
Display & Touch	LCD Size	15" 4:3 TFT LCD (LED backlight)	
	Brightness	400nits	
	Resolution	1024 x 768 (4:3)	
	Touch	True Flat Projected Capacitive Technology	True Flat Projected Capacitive Technology
Storage	HDD/SSD	1 x SATA III-2.5" / 2 x SATA III-2.5" (Option)	1 x SATA II-2.5"
	RAID Function	N/A / YES. Support RAID 0/1	N/A
I/O & Expansion	DC Input	1 x Mini Din 4P (DC +19V only)	
	Cash Drawer	1 x RJ-11 (Support DC +12V or +24V (default)) port supports 2 cash drawers	
	LAN port	1 x Intel Gigabit Ethernet by RJ-45	1 x Gigabit Ethernet by RJ-45
	USB port	4 x USB 3.0 2 x USB 2.0	4 x USB 3.0 2 x USB 2.0
	Powered USB Port (Option)	2 x 12v Powered USB 1 x 24v Powered USB	N/A
	COM port	3 x RS-232(COM1/2:DB-9, COM3:RJ-48) w/DC 0V/+5V/+12V, Selectable by BIOS (default setting is DC 0V)	
	VGA port	1 x DB-15 w/DC+12V. Power enables by BIOS setting (default is Disable)	
	Bus Expansion	1 x Mini-PCI-E Slot	
	Power Switch	1 x power on/off button	
	Speaker	HD Audio, 2W Speaker x 2	
OS Support		Win10 2016, Win8.1, Win7/POS Ready 7	
Power Adapter		External adapter, DC Model : Voltage:+19VDC, Std. 90watt. (Powered USB will use 180watt adaptor)	External adapter, DC Model : Voltage:+19VDC Std. 65watt
Compliance	Certifications	CE, FCC, LVD, RoHS	
	Protection	IP 66 on front panel	
Material		Main Unit: Die-Cast Aluminum	
Color		Main Unit: Space Gray / Black, Space Gray / White	


Model Name		• VariPOS 250 (PE21)	• VariPOS 250 (PE20)
Dimension (W x H x D mm)		365.89 x 354.48 x 196.55	
Environmental Condition	Operating	0°C ~ 40°C, 10% ~ 90% RH, non-condensing	
	Storage	-20°C ~ 60°C, 10% ~ 90% RH, non-condensing	
Optional Accessories	2nd Display	10.1 " Resolution 1280 x 800 (16:10 wide screen), USB Type	
	Customer Display (LCM)	2x20 LCM, USB Type	
	MSR	ISO 3-Tracks Slim MSR, USB Type	
	iButton	Dallas Key Reader, USB Type	
	RFID	13.56Mhz, USB Type	
	Fingerprint	DigitalPersona U.are.U 4500 Module, USB Type	
	Scanner	2D scanner, USB Type	
Carton		L 460 x W 300 x H 510 mm	

* The right has been reserved to change the specification without prior notice

Dimensions

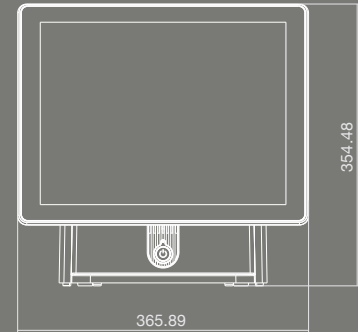


VariPOS 250 (PE21)

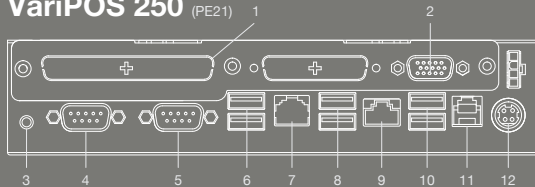

- | | | |
|-----------------------------|-----------|----------------|
| 1 Powered USB Port (Option) | 5 COM 1 | 9 LAN |
| 2 VGA | 6 USB 2.0 | 10 USB 3.0 |
| 3 Power Switch | 7 COM 3 | 11 Cash Drawer |
| 4 COM 2 | 8 USB 3.0 | 12 DC 19V |

VariPOS 250 (PE20)

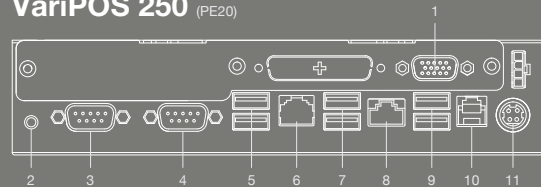

- | | | |
|----------------|-----------|----------------|
| 1 VGA | 5 USB 2.0 | 9 USB 3.0 |
| 2 Power Switch | 6 COM 3 | 10 Cash Drawer |
| 3 COM 2 | 7 USB 3.0 | 11 DC 19V |
| 4 COM 1 | 8 LAN | |

Poindus
www.poindus.com



Dataflex Security, s.r.o.

Shiran Tower
Lužná 716/2, Vokovice
160 00 Praha 6

+420 220 105 560

+420 728 955 443

info@dataflex-security.com

<https://www.dataflex-security.com/>

<https://eshop.dataflex-security.com/>