


Ultratenký odolný tablet TABSES917A

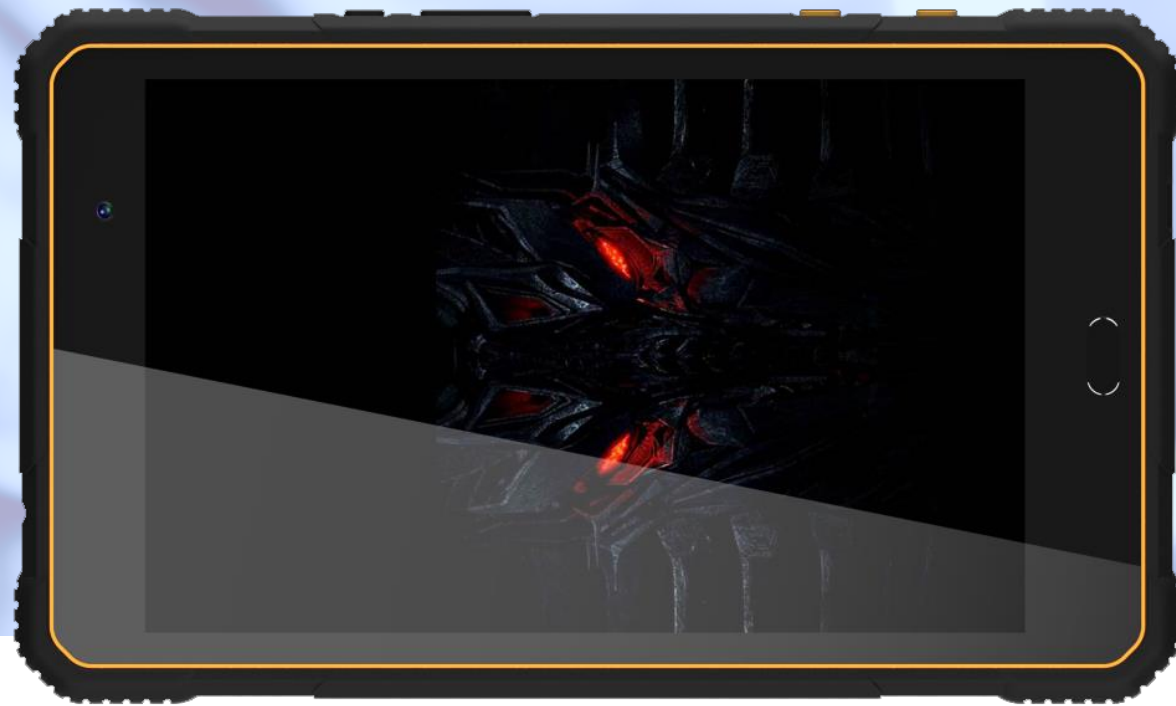

- Android 8.1
- Procesor Qualcomm, 8 core, 1.8GHz CPU/A53
- Jasný a čitelný displej 8" 1920x1200 IPS
- Konektivita 3G/4G, WIFI, Bluetooth, dual SIM card
- Certifikace CCC/CE/ROSH/FCC/IP65/MIL-STD-810
- Bezdrátové nabíjení

Volitelně

- 1D / 2D skener
- HF/UHF RFID reader
- Čtečka otisku prstu
- GPS

Operační systém	Android 8.1
CPU	Qualcomm SD630,CPU 1.8GHz/A53 Qcta core
GPU	Qualcomm® Adreno™ 508GPU
RAM	RAM:3G FLASH:32G
Úložiště	Micro SD, Maximum 128G
Audio	3.5mm audio Interface, has MIC and dual loudspeaker
USB port	5 pin MicroUSB; Support to connect U-disk/Mouse/Keyboard/OTG line
OTG	OTG extend RS232 serial port/485 serial port/RJ45 Serial port
Senzory	Gravity sensor, Compass, Acceleration and gyroscope sensors, Light and distance sensor
Odolnost	IP65 , drop resistance from 1.2m
Čtečka otisku prstu	Front fingerprint identification (fingerprint unlocking)
Provozní podmínky	Working:-20°C ~ +55°C Storage:-40°C ~ +60°C 5%-95% relative humidity; no condensation
Komunikace	--802.11a/b/g/n/ac (2.4G and 5G bands) --Bluetooth 4.0 --GPS+BDS+A-GPS+GLONASS,10m --High precise GPS: GPS+BDS 3-5m --2G/3G/4G 4G LTE: LTEB1/B3/B5/B7/B8/B20/B26/B34/B38/B39/B 40/B41 WCDMA: B1/B2/B5/B8 GSM: B2/B3/B5/B8 TD-SDMA: 34/39 CDMA 1X/EVDO:BC0
Displej	8 inch LCD screen, 1920*1200 IPS screen, capacitive touch screen
Klávesnice	Android menu, Homepage, Return, Volume+/-, Barcode, ON/OFF
Kamera	Front: 5MP Rear: 13MP with automatic focus and lighting function
Baterie	3.8V, 6000mAh; Standby about 500 hours Support Qi protocol wireless charging and USB QC3.0 fast charge.
Google play	Support
Rozměry	229.4*136.2*11.5mm 510g
Far infrared meter reading	Working frequency 37.9K
RFID	HF RFID(In Host): Support Mifare Classic 1 card UHF RFID (In Jacket): Supports EPC C1 GEN2/ ISO 18000-6C and ISO 18000-6B/6C protocol Reading distance:2.8m/4m Frenquency:865-868Mhz or 902- 928Mhz Ceramic antenna: 0.3db (25*25*4mm)
Čtečka čárových kódů	1D Laser Scanner Index (In Jacket): Honeywell N4313 or Zebra EM1350 Scanning speed: 104 times/second+12 times/second (two way scanning) Scanning distance: 2.5cm-114.3cm Scanning angle: 47±3°(default) /35±3°(reduced code)
	2D Barcode Scanner Index (In Jacket): Newlands EM3096 Or Honeywell N3680 Identification ability: 1D, 2D, OCR Scanning angle: rotate 360°, incline±50°, deflection ±50° Field of View: Horizontal 36°, vertical 23° Depth of field: 4cm-23.5cm Environmental luminance: 0~100,000 LUX
	2D Barcode Scanner Index (In Host): Zebra SE2100