


ADK07 – Office Docking

Product Overview



No.	Item
1	Latch
2	Alignment port (x2)
3	Docking connector

Front

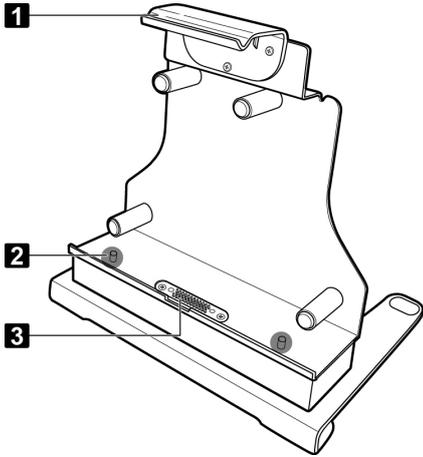

No.	Item
1	LAN (RJ-45) port
2	USB3.0 port (x2)
3	USB2.0 port (x2)
4	HDMI port
5	Serial port (RS-232)
6	DC-in jack *
7	Kensington lock slot


Rear

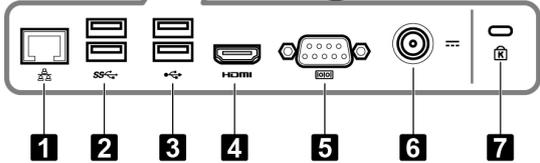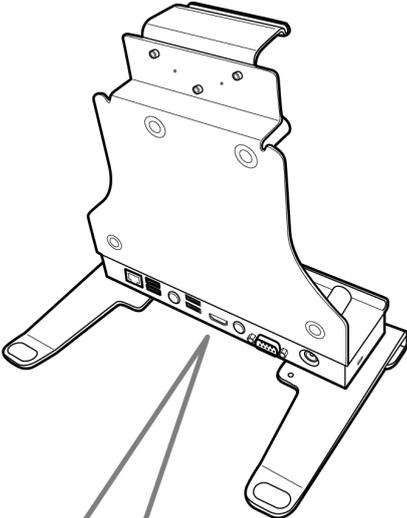

*Please contact dealer for appropriate adapter.

Installing the Stand



Align the stand holes with the holes at the bottom of the docking cradle as shown in the illustration. Then secure it with the four supplied screws.

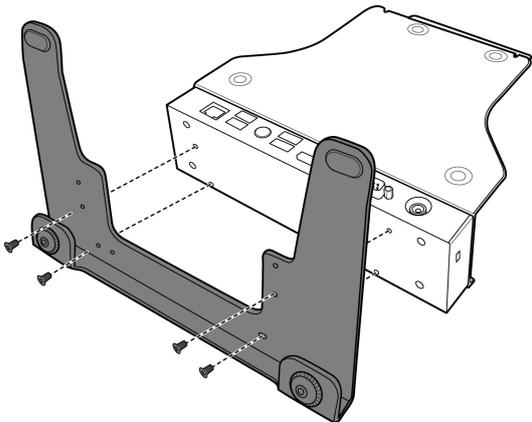


ADK07 – Office Docking

Docking the R11AH Tablet PC

1. With screen side facing out and docking connector down, install the R11AH Tablet PC into the alignment ports on docking cradle.
2. Using one hand, carefully push the top of the R11AH Tablet PC backward until the latch is fully engaged.

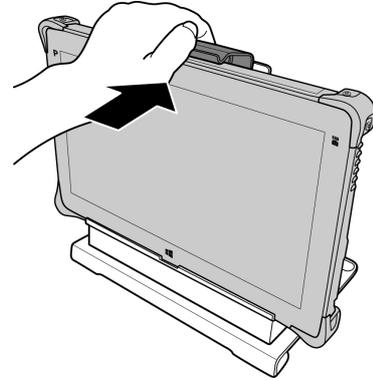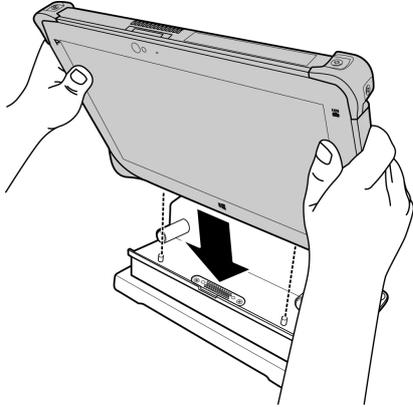

3. Ensure the R11AH Tablet PC is tightly secured to the docking cradle.

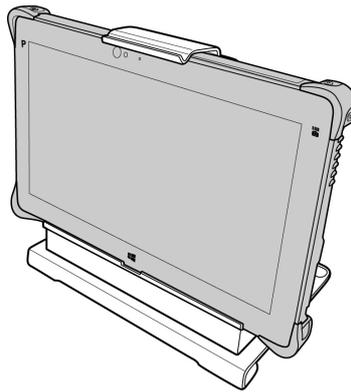

Undocking the R11AH Tablet PC

1. While pushing the latch upward, pull the R11AH Tablet PC forward until the latch is fully disengaged.
2. Use both hands to push slightly towards the VESA mount lock slide, and then remove the R11AH Tablet PC from the docking cradle.

